

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
13 October 2005 (13.10.2005)

PCT

(10) International Publication Number  
**WO 2005/095251 A1**

(51) International Patent Classification<sup>7</sup>: **B66B 7/00**

[US/US]; 6 Queen Street, Enfield, CT 06082 (US).  
STUCKY, Paul A. [US/US]; 1038 Melbourne Avenue,  
Stockton, CA 95203 (US).

(21) International Application Number:  
PCT/US2004/008205

(74) Agent: GASKEY, David J.; CARLSON, GASKEY &  
OLDS, 400 W. Maple Rd., Suite 350, Birmingham, MI  
48009 (US).

(22) International Filing Date: 16 March 2004 (16.03.2004)

(25) Filing Language: English

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NL, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,  
ZW.

(26) Publication Language: English

(71) Applicant (for all designated States except US): OTIS EL-  
EVATOR COMPANY [US/US]; Ten Farm Springs Road,  
Farmington, CT 06032 (US).


(72) Inventors; and

(75) Inventors/Applicants (for US only): VERONESI,  
William A. [US/US]; 342 Fairfield Ave., Hartford, CT  
06114 (US). ERICSON, Richard J. [US/US]; 71 Hunting  
Hill, Southington, CT 06489 (US). KOTHARI, Pankaj

(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

[Continued on next page]

(54) Title: ELECTRICAL CONNECTOR AND RESTRAINING DEVICE FOR USE WITH ELEVATOR BELTS

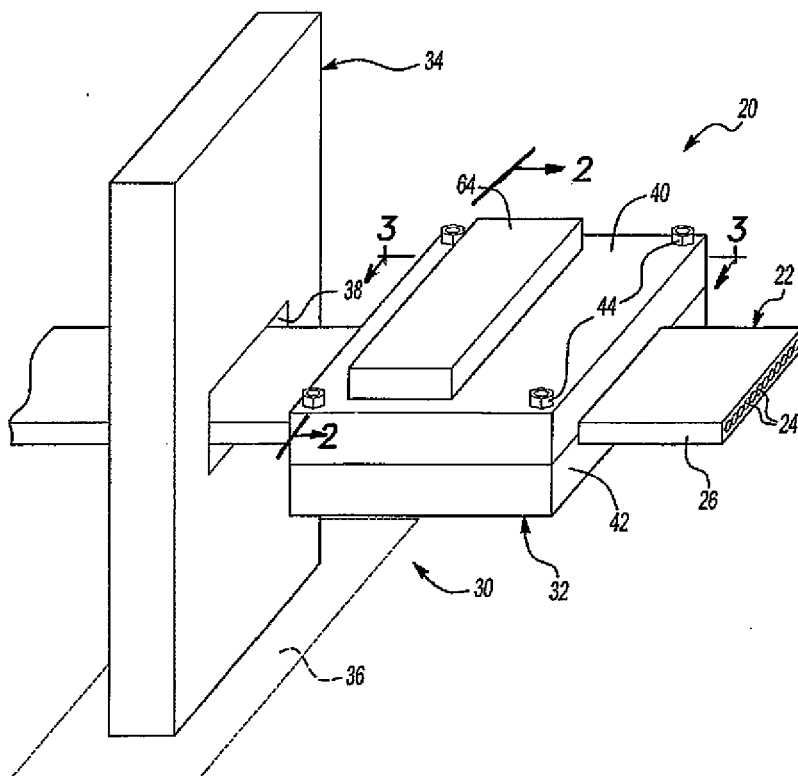

(57) Abstract: A device (30) for making electrically conductive contact with at least one tension member in an elevator belt (22) also provides a restraining feature to support loads on the belt. A connector portion (32) is secured to the belt. In one example, the connector portion (32) includes clamping members (40, 42) that are received on opposite sides of the belt. One of the clamping members supports a plurality of electrically conductive connector members (52) that establish electrical contact with selected tension members (24) within the belt (22). A plurality of load transferring members (66) are supported by the other clamping member in one example. A restraining portion (34) is adapted to be secured in a fixed position relative to a selected structure (36) within the elevator system. An opening (38) through the restraining portion (34) allows the belt (22) to pass but prevents the connector portion (32) from moving beyond the restraining portion (34) as the outside dimension of the connector portion (32) is larger

than the size of the opening (38). In one example, high temperature resistant materials such as steel or ceramics are used for the restraining portion (34) and the clamping members (40, 42).



Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Declaration under Rule 4.17:**

— *of inventorship (Rule 4.17(iv)) for US only*

**Published:**

— *with international search report*